



Feature:

All weather loudspeakers for music applications and projects.
 Ideal for indoor outdoor BGM and paging system
 IP66 waterproof finish for all extreme weather applications
 6.5" weatherproof woofer and 1" silk tweeter 2-way speaker system
 ABS enclosure, stainless metal grille & stainless mounting bracket
 Power output 40-20-10-5-2.5W & 8Ω
 70V/100V speaker with power tapping or as a low impedance 8 Ohm speaker
 Waterproof cable wiring cover for IP66 secure weatherproof protection
 Ultra- reliable, fail safe loudspeaker even at high power loads
 Supplied with 360° rotatable bracket for horizontal and vertical installation angle adjustment


Specification:

Model	W-640	W-640W
Description	Indoor Outdoor Wall Mount Speaker	
Rated Power Output	40W and Max. 80W	
Power Taps	40-20-10-5-2.5W & 8Ω	
Line Input	100V or 70V & 8Ω	
Frequency Response	65-20KHz	
SPL(@1W/m)	94±3dB and Max 112dB (1m)	
IP Rate	IP66	
Speaker Unit	6.5" weatherproof woofer and 1" silk tweeter 2-way speaker system	
Dispersion	Vertical: 180° and Horizontal: 180° (1KHz)	
Dimension	280×150×180mm	
Material	ABS enclosure, stainless metal grille & stainless mounting bracket	
Color	Black	White
Mounting Way	360° rotatable bracket for horizontal and vertical installation angle adjustment	
Net Weight	3.5kg	


Side View:



Mounting Bracket

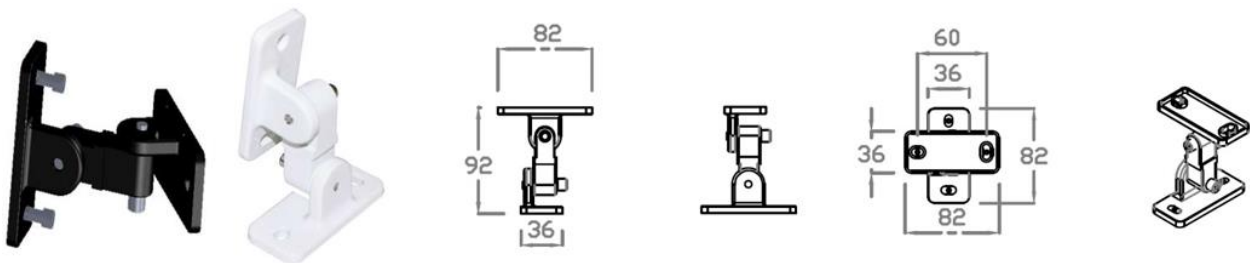

SPL & Impedance VS Freq Diagrams:

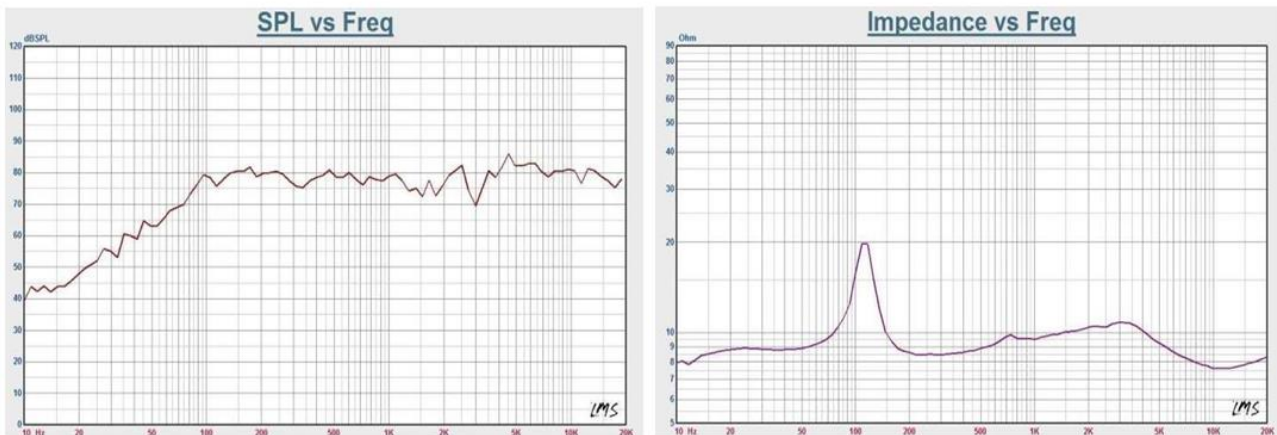

Tender Specification:

The all weatherproof wall mount speaker shall be designed with 6.5" weatherproof woofer and 1" silk tweeter 2-way speaker system. The rated power output at 40 watts and max power output at 80 watts. The music loudspeakers shall support 70V/100V transformer power tapping of 40W, 20W, 10W, 5W & 2.5W or as a low impedance 8 Ohm version. The wall mount speaker shall be IP66 waterproof rate, which is made of high quality ABS enclosure, stainless metal grille & stainless mounting bracket. The wall mount loudspeaker shall support wide range dispersion angle up to vertical: 180° and horizontal: 180° (1KHz). The loudspeaker is designed of high SPL up to 94±3dB and Max 112dB (1m). The Wall mount loudspeaker support all music and paging system because of its wide range frequency response of 65-20KHz. The supplied mount bracket shall support 360° rotatable bracket for horizontal and vertical installation angle adjustment. The wall weatherproof wall mount speaker comes with black & white two color option.